


Braddock Hammered Truss

216" Width

Shown: 6/12 Pitch

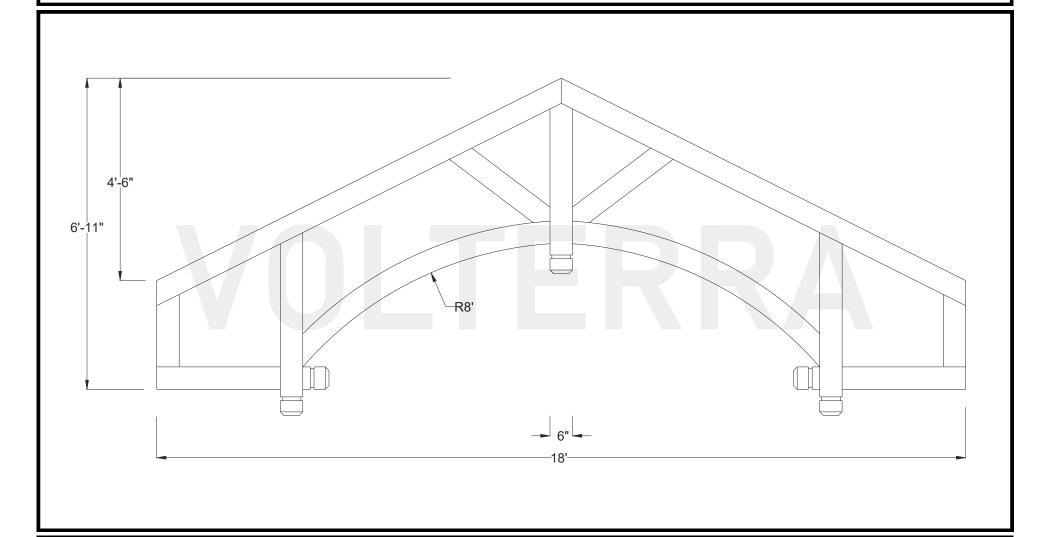

Volterra Architectural Products LLC — 1902 North 22nd Avenue — Phoenix, AZ 85009 — 602.258.7373


WWW.volterraproducts.com



Braddock Hammered Truss

216" Width

Dimension Sheet

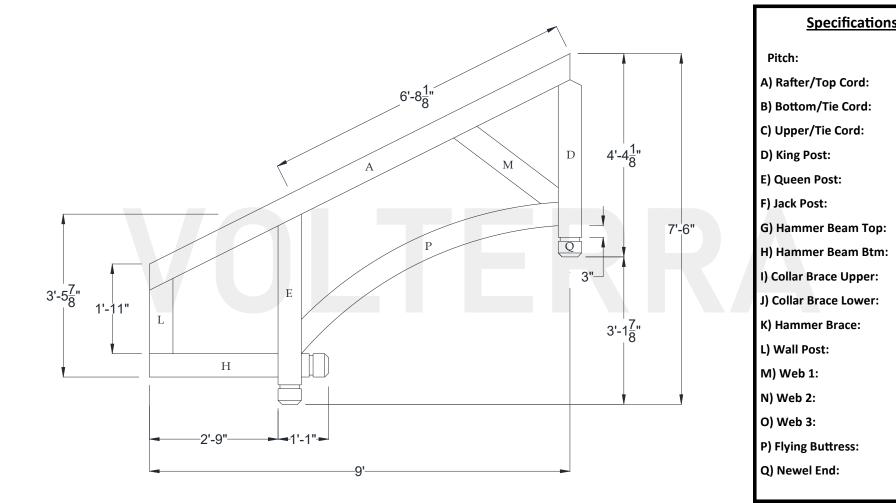

Specifications

6/12

6" x 6"

B) Bottom/Tie Cord: N/A

N/A

6" x 6"

6" x 6"

N/A

N/A

6" x 6"

N/A

N/A

N/A

6" x 6"

6" x 6"

N/A


N/A

6" x 6"

XC



Braddock Truss Recommended Interior Installation Procedures

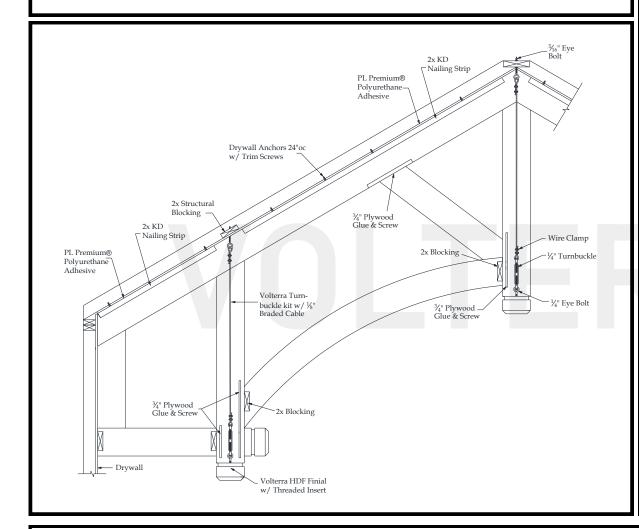

A: Layout beams on ceiling and chalk lines to the inside of rafter beam.

B: Measure down ridge and screw in threaded eye bolts into structural blocking at all points.

C: Place KD nailing strip on chalk line and pre-drill ½" holes 24" on center through strip and into drywall. Install drywall anchors into predrilled holes. Apply ½" bead of PL adhesive to top of nailing strip and install using deck screws.

D: Measure, cut and dry fit rafter beam then pull beam down. Apply PL adhesive to sides of nailing strips. Install rafter beam and use finish screws to secure 24" on center.

E: Cut 3"-4" diameter round hole for king/queen post turnbuckles.

F: Measure correct length and cut braided cable and install turnbuckle kit. Glue and screw off ¾" screw plate to inside of king and queen post for connection of hammer beam, web and flying buttress. Stain raw foam on king/queen post and loose side. Install king/queen posts and their 4th side.

G: Glue and screw 2x blocks for hammer beam and flying buttress. Measure and cut parts. Dry fit first. Apply PL adhesive to contact areas. Install using trim screws.

H: Measure, cut and dry fit web beam. Glue and toe screw in place. Patch holes and touch up HDF if necessary.